



## Electrical specs and installation guidelines.

This document should provide all the information required to pass on to an electrical contractor to have power supplied to your new workroom. If for any reason any other information is required, please do not hesitate to put your electrician in touch with us directly, we will do our best to answer any questions they may have.

Building Size	4.2m	3.2m	2.3m	CUBE
Number of double power points	6	3	3	3
Track lighting with 5w LED lamps	6	4	3	3
WIFI thermostat controlled panel heater	1000w	800w	600w	600w
Data entry provided data cable	YES	YES	YES	YES
BG Consumer unit IP65 rated	40A 30mA	40A 30mA	40A 30mA	40A 30mA
MCB usage in consumer unit	20A, 10A, 6A	32A, 6A	32A, 6A	32A, 6A

Everyone of our workrooms is professionally wired in and tested by certified electricians before leaving our Bristol workshops. You will be provided with an electrical certificate with you handover pack once a project is complete. This means there is no need to have our electricians visit any of our sites. Because of this we have developed a system that means all of our buildings are powered up and tested before we leave any project.


We will provide you with a Gewiss wall mounted IP 67 rated wall socket for your electrical contractor to wire into. They will need the specs of the building in the table above in order to ensure they run the appropriate cable for the job. We ask that this be completed before our allocated installation date. This will mean that we can check everything is working as it should be before we leave your installation.






## Electrical specs and installation guidelines.

The consumer unit will be mounted to the back of your workroom around 50cm off the floor in the middle of the building. We ask that you have the wall mounted switch mounted no further that 150cm from this. We will have around 2m of flex on our plug maximum so this will need to reach to the switch as our consumer unit is not able to be moved.

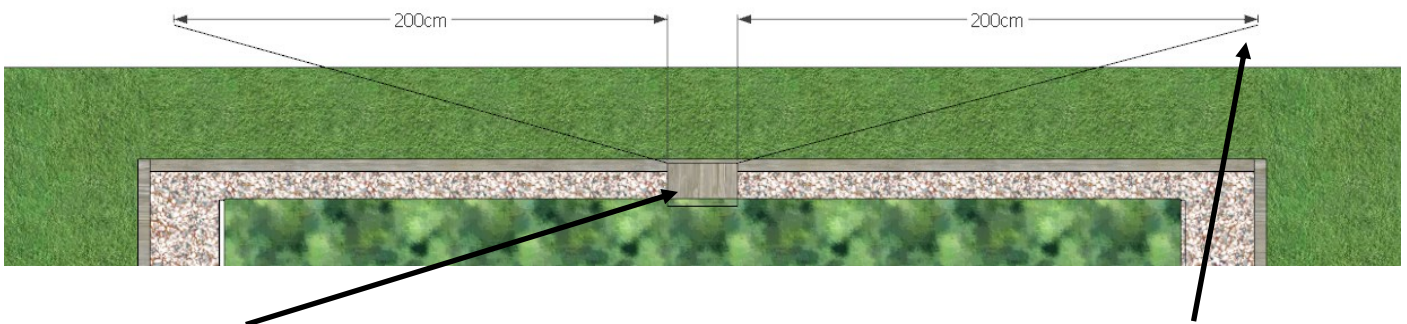

Consumer unit mounted at rear of workroom around 50cm from floor

Please mount switch no further than 1.5m from consumer unit. There will be a 2m SY flex between our consumer unit and the plug.

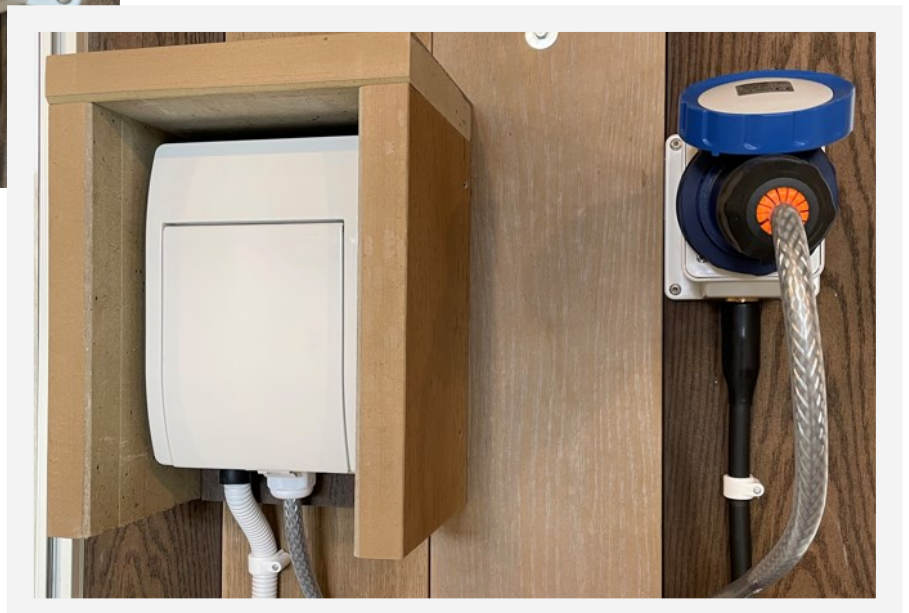

For more information about our product or electrical specs, please get in touch with Jack at LGR on

0117 2870197

Jack@ukworkroom.co.uk

4a/b Merton Rd, Bristol, BS78TL